




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04Q 7/38</b>		(11) International Publication Number: <b>WO 00/44189</b>
A1		(43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/EP99/00452 (22) International Filing Date: 25 January 1999 (25.01.99) (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): RÄSÄNEN, Juha [FI/FI]; Pensaskertuntie 8A, FIN-02660 Espoo (FI). (74) Agent: PELLMANN, Hans-Bernd; Tiedtke-Bühling-Kinne, Bavariaring 4, D-80336 München (DE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.

(54) Title: INTERWORKING BETWEEN RADIO ACCESS NETWORKS

## (57) Abstract

The present invention discloses a method of interworking between different radio access networks (RAN-A, RAN-B). In this method, a radio transceiver device capable of operating with the first radio access network (RAN-A) and the second radio access network (RAN-B) is attached to the first radio access network (RAN-A). The method comprises the steps of detecting (S11) a service request, accessing information on conditions for the first and the second radio access network (RAN-A, RAN-B) for giving sufficient support for a service requested by the service request; analysing (S12) whether or not the first radio access network (RAN-A) and the second radio access network (RAN-B) meets the conditions, and initiating a handover (S14) of the radio transceiver device (MS) from the first radio access network (RAN-A) to the second radio access network (RAN-B) if the second radio access network (RAN-B) meets the conditions but the first radio access network (RAN-A) does not. Thus, the method according to the present invention serves to support dual mode mobile stations and networks in such a way that the correct radio access which sufficiently supports a requested service is automatically obtained.

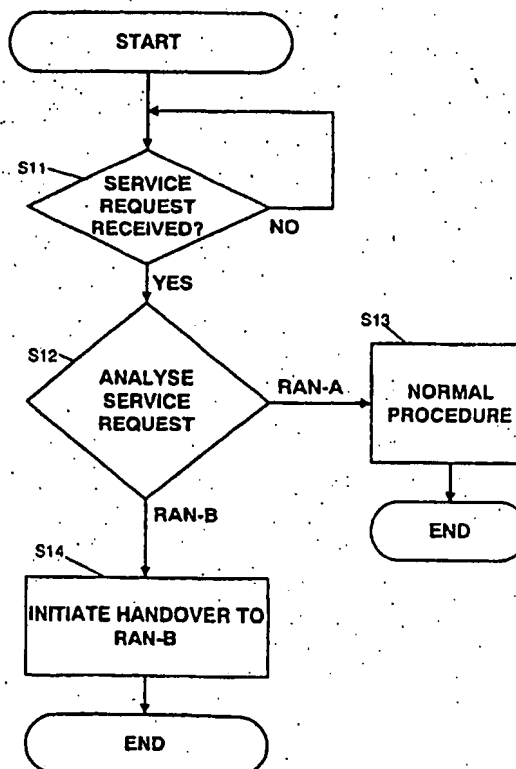

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTERWORKING BETWEEN RADIO ACCESS NETWORKS

5 FIELD OF THE INVENTION

The present invention relates to a method of interworking  
between different radio access networks which support  
different services or which support services with  
10 different qualities.

BACKGROUND OF THE INVENTION

The evolutionary development of the so-called 2<sup>nd</sup>  
15 generation mobile networks towards the so-called 3<sup>rd</sup>  
generation networks leads to network configurations where  
both, 2<sup>nd</sup> and 3<sup>rd</sup> generation radio access networks,  
operate with the same core network CN. In the first phase  
such 3<sup>rd</sup> generation radio access networks RAN will cover  
20 only hot spots, i.e. regions with high radio traffic  
load, later they will cover wider and wider areas.

Thus, radio transceiver devices will have to be  
introduced which will be able to operate with either of  
25 the radio access networks. This kind of radio  
transceivers is referred to as dual mode mobile stations  
MS.

In the GSM network two different accesses exist, i.e. GSM  
30 900 and GSM 1800. However, the GSM 900 and 1800 dual  
access differs from the situation described above in that  
the GSM 900 / 1800 dual access offers the same services  
to the subscribers through both accesses, whereas in the  
2<sup>nd</sup>/3<sup>rd</sup> generation dual access the difference between the  
35 two radio access methods and the development of the core

- 2 -

packet network lead to a situation where the same services are not necessarily specified, not to mention implemented in both the 2<sup>nd</sup> and 3<sup>rd</sup> generation accesses. Even if the same services are specified, it may not be profitable nor reasonable to implement them in all networks.

There are several services that most probably will be supported by only one of the radio access network types. Such services are, for example, non-transparent circuit-switched services which are redundant in the 3<sup>rd</sup> generation radio access network, but which are widely used in the 2<sup>nd</sup> generation radio access network (GSM network).

Furthermore, transparent circuit-switched services are redundant in the 3<sup>rd</sup> generation radio access network, since the 3<sup>rd</sup> generation access network will be able to support a real-time packet transmission. On the other hand, transparent circuit switched services provide the only real-time service in GSM.

Moreover, real-time packet services are not available in GSM, whereas these services are available and important in the 3<sup>rd</sup> generation radio access network.

Thus, these circuit-switched services are very important in the current GSM networks. They will also be important in the foreseeable future because of their wide acceptance and introduction in the networks and because the forthcoming GSM packet service (GPRS) cannot support real-time transmission.

In contrast thereto, the 3<sup>rd</sup> generation network (UMTS, (universal mobile telephone system) will be able to

- 3 -

support real-time packet transmission. This will make circuit-switched services redundant. Especially the implementation of the non-transparent circuit-switched services in the 3<sup>rd</sup> generation access will be  
5 questionable due to their redundancy, complexity and costs involved.

Thus, the dual mode mobile stations will have to operate in networks with various degrees of service support. Some  
10 3<sup>rd</sup> generation accesses will support only packet services, some both packet services and transparent circuit switched services, some may even support both packet services and non-transparent circuit-switched  
15 access network). Some 2<sup>nd</sup> generation accesses will support only circuit-switched services, some both circuit-switched and (non-real-time) packet services.

Therefore, a new situation for the mobile stations  
20 arises. On the one hand, it is possible that a mobile station is attached to a 3<sup>rd</sup> generation cell and is requested (or requests itself) a service supported only by the 2<sup>nd</sup> generation access. Vice versa, it is also  
possible that a mobile station is attached to a 2<sup>nd</sup>  
25 generation cell and is requested (or requests itself) a service supported only by the 3<sup>rd</sup> generation access.

This leads to the drawback that in these situations only those services can be requested and used which are common  
30 to both a 2<sup>nd</sup> generation radio access network and a 3<sup>rd</sup> generation radio access network.

In addition, in case of services supported by both networks, there are several services which are supported  
35 with different qualities by different radio access

networks. For example, the different radio access networks can provide different communication bit rates. Moreover, the price of connection can be different. For example, UMTS will be most probably more expensive in beginning, whereas later on GSM could be more expensive. Furthermore, the same services can be provided with different delays. In the prior art, these differences are not taken into account.

Thus, the above described drawbacks of the prior art result in a limited usability of a respective mobile station.

#### 15 SUMMARY OF THE INVENTION

Hence, the object underlying the present invention resides in providing a method by which the above described drawbacks are removed.

20

This object is achieved by a method of interworking between different radio access networks. In detail, in this method, a radio transceiver device capable of operating with the first radio access network and the second radio access network is attached to the first radio access network. The method comprises the steps of detecting a service request, accessing information on conditions for the first and the second radio access network for giving sufficient support for a service requested by the service request, analysing whether or not the first radio access network and the second radio access network meets the conditions, and initiating a handover of the radio transceiver device from the first radio access network to the second radio access network.

30

if the second radio access network meets the conditions but the first radio access network does not.

As an alternative, according to the invention the above  
5 object is solved by a network interworking device for a telecommunication network comprising at least two radio access networks. For this device, a radio transceiver device capable of operating with the first radio access network and the second radio access network is attached  
10 to the first radio access network. The device comprises a detecting means for detecting a service request. Furthermore an analysing means responsive to the detecting means is provided which comprises the functionality of accessing information on conditions for  
15 the first and the second radio access networks for giving sufficient support for the a service requested by the service request and analysing whether or not the first radio access network and the second radio access network meet the conditions. Moreover, the network interworking  
20 device comprises initiating means responsive to the analysing means, the initiating means being adapted to initiate a handover of the radio transceiver device from the first radio access network to the second radio access network if the respective conditions are not met by the  
25 first radio access network but by the second radio access network.

Further advantageous developments are defined in the dependent claims.

30 By the above-mentioned method, the drawbacks of the prior art are removed. That is, by the method according to the invention, a situation can be handled in which a service is provided which is not supported by a currently used  
35 radio access network but by another one. This is achieved

- 6 -

by effecting a handover from the first to the second radio access network.

In addition, it is also possible to initiate a handover in case a service is more sufficiently supported by the second radio access network than by the first one. Thus, the present invention provides a more flexible usability of the mobile stations.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more readily understood with reference to the accompanying drawings in which:

Fig. 1 shows a general network architecture in a schematic block diagram;

Fig. 2 shows a flowchart of a process performed by the network controlling device according to the first embodiment of the present invention;

Fig. 3 shows a flowchart of a process performed in an analysing step S12 of Fig. 2,

Fig. 4 shows a flowchart of a process performed by a radio transceiver device according to the second embodiment of the present invention, and

Fig. 5 shows a device in which the method according to the invention is carried out.



DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

According to the invention, a service request is analysed and compared with the capabilities of a first radio  
5 access network RAN-A on which a mobile station is currently located.

If the radio access network RAN-A does not support the requested service or does not support the requested  
10 service sufficiently, but the core network does support the service, a handover is initiated to the other radio access network RAN-B which supports the requested service sufficiently and has coverage in the area.

15 Thus, the method according to the present invention serves to support dual mode mobile stations and networks in such a way that the correct radio access which supports the requested service sufficiently is automatically obtained.

20

This method can be performed in a network control device (for example, a mobile services switching center, MSC, or an interworking unit, IWU, or a base station controller, BSC, or a packet network node, PNN) or in the radio  
25 transceiver device (mobile station). The method can be performed by the network control device in case the service requested is specified, for example, in international standards, but not implemented in the network. In contrast thereto, if it is not specified, the  
30 method can be carried out either in the radio transceiver device or in the network control device.

Hereinafter, the general network architecture is described with reference to Fig. 1.

35

- 8 -

A core network CN comprises at least one packet network node PNN and one MSC (mobile services switching center) and one IWU (interworking unit). For simplifying the diagram, the interconnections between the PNN, the MSC and the IWU are not shown. The core network CN (i.e., the PNN, the MSC and/or the IWU) communicates with a radio access network RAN-A and a radio access network RAN-B. Each radio access network has at least one base station controller BSC\_A and BSC\_B.

10

In this example, only one cell Cell\_A\_1 of the network RAN-A and one cell Cell\_B\_1 of the network RAN-B are shown in Fig. 1. The cell Cell\_A\_1 is provided with a base station BS\_A\_1, and the cell Cell\_B\_1 is provided with a base station BS\_B\_1. The base stations BS\_A\_1 and BS\_B\_1 communicate with the base station controllers BSC\_A and BSC\_B.

The cells Cell\_A\_1 and Cell\_B\_1 have an overlapped region in which the radio access network RAN-A and the radio access network RAN-B can be accessed.

For the purpose of following description, it is assumed that a mobile station MS is located in this overlapped region. The mobile station MS is capable of communicating with both radio access networks. That is, the mobile station MS is adapted to both radio access networks and is present in the same coverage area. For example, the mobile station MS may be a dual mode phone.

30

Depending on the reason why a service is not supported by the first radio access network RAN-A sufficiently, there are various scenarios as to how, and by which means, the method of the present invention can cope with these situations.

35

In principle, the method can either be carried out in the mobile station MS or in the network controlling device MSC or IWU or BSC or PNN. Hereinafter, these two cases are described in two embodiments. Moreover, in both cases it can further be distinguished between a mobile-originated and a mobile-terminated case.

#### First embodiment

10

The first case is described as a first embodiment of the invention. In this embodiment, a method is described which is performed in a network control device (e.g., MSC, IWU, BSC or PNN) of the core network CN.

15

It is assumed that a mobile station MS is located in the first radio access network RAN-A. The mobile station MS requests a service which is specified (for example, in international standards) but which is not implemented in the first radio access network. Since the service is specified in general, the mobile station can assume that the service is also specified in the current first radio access network RAN-A. However, the mobile station MS cannot know whether this service is implemented in the network or not, that is, whether the requested service is supported by the first radio access network RAN-A or not.

20

On the other hand, the network is aware of its capabilities. Hence, the network control device (e.g. MSC or IWU or BSC or PNN) can determine whether the network supports the requested service or not. In case the network does not support the requested service, the network can initiate a handover to another radio access network which supports this service and which has coverage in the area where the mobile station is located.

30

35

- 10 -

The same process can be carried out in case a requested service is supported by both radio access networks, but the requested service is supported more sufficiently by the second radio access network.

Thus, the requested service is analysed whether it is supported or not and whether there is a more sufficient support of this service by another radio access network. That is, the analysis is carried by analysing whether the radio access networks RAN-A and RAN-B meet certain conditions with respect to the requested service.

The simplest condition is whether the requested service exists in the radio access network in question, i.e., in the radio access network RAN-A or not. Other conditions could be, for example, a condition for the bit rate, delay requirements or the price of the connection.

In the following, an example is described in which a requested service is not supported by the first radio access network RAN-A.

This process is described with reference to a flowchart shown in Fig. 2.

In a first step S11, the process waits for a service request. When a service request is received, the process proceeds to a second step S12, in which the service request is analysed and compared with the capabilities of the radio access network RAN-A currently used by the mobile station MS. For example, the analysis could be effected by comparing the received service request with a set of services available in the radio access network RAN-A. The list of available services can be stored in a

- 11 -

table or the like. If it is determined that the service request is supported sufficiently by the radio access network RAN-A, the process branches to a step S13 in which the normal processing of the service request within the network is performed.

On the other hand, if it is decided in step S12 that the requested service is not supported sufficiently (as described above) by the radio access network RAN-A but by a second radio access network RAN-B, the process branches to a step S14. In this step S14, a handover to the second radio access network RAN-B is initiated.

In the following, a more concrete example of the present embodiment is described, in which a service is implemented in only one of the two radio access networks. The core network can be a GSM core network comprising a GSM radio access network and a UMTS (universal mobile telephone system) radio access network. Non-transparent circuit-switched services are only implemented in the GSM network. In contrast thereto, the UMTS network supports packet services and, possibly, transparent circuit-switched services, but no non-transparent circuit-switched services.

Now it is assumed that a dual mode phone is located in a UMTS cell and requests a non-transparent circuit-switched data call. This could happen, for example, if a user wishes to communicate with a mail server of a company or with a remote access server. The non-transparent circuit-switched service is not supported by the UMTS network. However, it is specified there.

In this case, the above procedure is carried out. That is, the service request is analysed. The network

controlling device, i.e. the IWU (interworking unit) or the MSC (mobile services switching center) of the radio access network, detects that the requested service, i.e. the non-transparent circuit-switched data call, cannot be performed in the UMTS network but is supported by the GSM network. Hence, a handover to the cell of the GSM network is initiated, which has coverage in the area of the cell of the UMTS network in which the mobile station MS is located.

Thus, according to the first embodiment, it is possible to execute a service which is requested by a mobile station and which is not supported by the currently used radio access network (RAN-A) by performing a handover to a second radio access network (RAN-B). Furthermore, it is possible to execute a requested service by that radio access network which supports the service more sufficiently. The necessary analysis of the service request is effected in the network control device (e.g. MSC or IWU or BSC) of the currently used radio access network (RAN-A), since the service is specified in general, but it is not clear to the mobile station MS whether this service is implemented in the currently used radio access network (RAN-A).

In the following, an example is described in which a requested service is supported by both radio access networks RAN-A and RAN-B.

In this case the process performed is the same as described with respect to Fig. 2. However, since in this case the condition is not only whether the requested service is present or not, the analysis step S12 shown in Fig. 2 is described in more detail with respect to Fig.

3.

For determining whether the first or the second radio access network supports the requested service more sufficiently, the conditions for this have to be specified. That is, it is analysed whether the second radio access network supports a service by a given amount better. This given amount can be defined by a norm or a threshold. In this example, the given amount can be, for example, 10 % of the current bit rate of the first radio access network RAN-A. That is, in this case the condition for the second radio access network RAN-B supporting the requested service more sufficiently than the first radio access network RAN-A is the condition that the bit rate is at least 10 % higher.

The conditions as to whether the first radio access network RAN-A supports the requested service more sufficiently than the second radio access network RAN-B can be set previously and stored in a database, for example.

In the process shown in Fig. 3, the condition is obtained in step S121. Then, it is determined whether the condition is already met by the currently used first radio access network RAN-A. In the above example of the bit rate, the desired bit rate is compared with the bit rate provided by the radio access network RAN-A, which can be supplied from the database, for example.

If it is determined in step S121 that the condition is met by the first radio access network RAN-A, the flow branches to a step S125 in which "RAN-A" as the result of the analysis is output. That is, in the process shown in Fig. 2, the flow branches to step S13, in which a normal procedure is carried out and the currently used radio

- 14 -

access network RAN-A is maintained. That is, in the above example of the bit rate, "RAN-A" is output if the desired bit rate of 10 % higher than the currently used bit rate can already be provided by the current radio access network RAN-A.

On the other hand, if it is determined in step S122 that the condition is not met by the first radio access network RAN-A, the process advances to step S123 in which it is determined whether the condition is met by the second radio access network RAN-B. If the condition is not met by the second radio access network RAN-B, the flow branches to the step S125. That is, the mobile station MS maintains the connection to the first radio access network RAN-A. In the above example of the bit rate, this occurs in case the bit rate is, for example, only higher by about 5 %.

However, in case that the condition is met by the second radio access network RAN-B, the flow branches to a step S124, in which "RAN-B" is output as the result of the analysis step. That is, in the process shown in Fig. 2, the process advances to the step S14 in which a handover to the second radio access network RAN-B is initiated.

In the above example, the threshold by which the condition is analysed is set on such a value that a handover is not always initiated. That is, in the above example, it is taken into account that a handover is only initiated in case bit rate provided by the second radio access network RAN-B is considerably higher than the bit rate of the currently used radio access network RAN-A. As a matter of course, this threshold can be varied as necessary. That is, if it is desired, the threshold can be set such that the handover is initiated simply in case



- 15 -

that the bit rate of the second radio access network RAN-B is higher.

Moreover, as a matter of course the condition for a  
5 handover from the first to the second radio access network is not limited on the bit rate but can be plurality of different conditions as the price of connection, delay requirements, stability of the connection (for example, signal strength etc.) and  
10 others.

Furthermore, a plurality of conditions can be combined or made dependent on each other. For example, a first  
15 condition for a service can be a higher bit rate, and a second condition the price of connection. A combined condition for initiating a handover to the second radio access network RAN-B can be that the second radio access network RAN-B has a considerably higher bit rate, but that the price of connection is only moderately higher  
20 than that of the currently used first radio access network RAN-A.

#### Modifications of the first embodiment

25 In the preceding section, the first embodiment has been described for a mobile-originated case. However, the process according to this embodiment is also applicable to a mobile-terminated case. There, a service request  
30 from outside the radio access network in which the mobile station MS is located is to be analysed. Nonetheless, the above steps S12 to S14 remain the same.

Second embodiment

Next, as a second embodiment, the above mentioned second case will be described in which the mobile station itself performs the analysis of a service request.

As in the above first embodiment, the mobile station MS is located in a cell of the first radio access network RAN-A. In principle, the same process performed in the network control device as according to the first embodiment can be carried out. However, in this case it is assumed that the mobile station MS requests a service which is not specified (for example, in international standards) for the RAN-A type access. Thus, the mobile station MS knows that this service is not supported by the radio access network in which it is located.

Consequently, in a mobile-originated case, the mobile station MS itself analyses the service request, which is issued by, for example, application software or the terminal (TE), i.e. the mobile station itself, and compares it to the capabilities of the currently used radio access network RAN-A. If it is determined that the radio access network RAN-A cannot support the requested service, but the second radio access network RAN-B can, the mobile station MS initiates or requests a handover to the RAN-B type of access.

The above process is described with reference to a flowchart shown in Fig. 4.

As mentioned above, this process is performed in the mobile station MS. In a first step S21, the process detects whether a service request is required or not. The service request can be issued by an application in the

- 17 -

mobile station or by the terminal (TE), i.e. the mobile station itself. When it is detected that a service request is desired, the process proceeds to a second step S22. In this step S22, the service request is analysed and compared with the capabilities of the radio access network RAN-A currently used by the mobile station MS. The analysis can be similar to that in step S12 according to the first embodiment. If it is determined that the service request is supported or is supported more sufficiently by the currently used radio access network RAN-A, the process branches to a step S23 in which the connection with the radio access network RAN-A is maintained and the service request is issued.

On the other hand, if it is decided in step S22 that the service requested is not supported by the radio access network RAN-A (that is, is not implemented in the radio access network RAN-A), but by the second radio access network RAN-B, the process branches to a step S24. In this step 24, the mobile station MS itself initiates or requests a handover to the second radio access network RAN-B.

As in the description of the first embodiment, in the following a more concrete example of the second embodiment is described. Likewise as in the former example, the core network is a GSM core network comprising a GSM radio access network and a UMTS (universal mobile telephone system) radio access network. The UMTS supports packet service and, possibly, transparent circuit-switched services, whereas in the UMTS no non-transparent circuit-switched services are specified, since these services are regarded as redundant due to the presence of packet services.

35

In this situation, a dual mode phone is located in a UMTS cell. It is now assumed that the application or the user of the mobile station requests a non-transparent circuit-switched call. This could happen, for example, in case  
5 the user wishes to access a mail server of his company or a remote access server.

Now, the mobile station MS analyses the service request. The mobile station MS determines that the mobile station  
10 is currently located in a UMTS radio access network that does not support the non-transparent circuit-switched service. However, the GSM radio access network supports the requested service. Hence, the mobile station  
15 initiates or requests a handover to a cell of the GSM radio access network which has coverage in the area of the cell of the UMTS network in which the mobile station MS is located.

Thus, according to the second embodiment, it is possible  
20 to execute a service which is requested by a mobile station and which is not specified by the current radio access network (RAN-A) by performing a handover to a second radio access network (RAN-B). The necessary analysis of the service request is effected in the mobile  
25 station, since the service is not specified in the currently used radio access network (RAN-A), and hence it is clear that this service is not supported by this network.

30 Moreover, according to the second embodiment, the process described with respect to Fig. 2 can be carried out in the same way as according to the first embodiment. That is, the process performed in the analysis step S22 can be the same as that shown in Fig. 2. Therefore, a

description of this process as carried out in the mobile station MS is omitted here.

5 Modifications of the second embodiment

Regarding the second embodiment, modifications similar to those described in the first embodiment are possible. That is, although a mobile-originated case has been  
10 described above, also a mobile-terminated case is possible. In this case, a service request from outside the radio access network in which the mobile station MS is located is to be analysed. The service request can be analysed in the mobile station. However, it is preferable  
15 that the network (i.e., the network controlling device MSC or IWU) analyses the service request and initiates the handover, if necessary. In this case, a process similar to the one according to the first embodiment is executed.

20 Furthermore, in case of both embodiments, it is possible that a service is requested which is neither supported by the first radio access network RAN-A nor by the second radio access network RAN-B. Moreover, it is also possible  
25 that a service is requested which is supported by none of other available radio access networks. In this case, an error procedure can be initiated. This can be effected, for example, in a modified analysing step S12 or S22. The error procedure could, for example, issue a corresponding  
30 notification to the mobile station and its user.

In both embodiments the service request is analysed as to whether the requested service is supported better by the currently used radio access network RAN-A or by the  
35 second radio access network RAN-B. This analysis can be

performed, for example, by comparing the requested service with all services available in the radio access network. Thus, especially in the case of the second embodiment, the mobile station MS must have a list of all these services. This list can be provided by the network  
5 controlling device during establishment of a call, for example. That is, information regarding the services supported by the respective radio access network could be incorporated in the BCCH signal. During a call, the above  
10 information could be incorporated in the DCCH signal.

The above examples of the embodiments describe a handover from a UMTS to a GSM radio access network. However, it is obvious that the handover can also be effected in the  
15 other direction.

Hereinafter, an example for such a handover in the other direction is described. It is assumed that a mobile station MS is located in a GSM radio access network. In  
20 this situation, a real-time packet service is requested, either by the terminal application or by the core packet network. The network (in the first embodiment) or the mobile station MS (as in the second embodiment) analyses the service request, determines that the mobile station  
25 MS is currently in a GSM radio access network that does not support the requested real-time packet service and initiates a handover to a cell of a UMTS radio access network in this area.

30 In the following, examples of the above-mentioned analysis of the service request according to the invention are described.

Concerning circuit switched services as the requested  
35 service, the mobile station MS requests a service by

sending a SETUP message to the network. The SETUP message contains (among other things) a Bearer Capability Information Element (BCIE). The BCIE carries detailed parameters related to the requested service, e.g. data  
5 rate, connection type (transparent/non transparent), mode (asynchronous/synchronous).

In a mobile terminated call the BCIE comes from ISDN or from the Home Location Register (HLR) of the GSM network.

10

The (GSM) network control device MSC analyses the BCIE parameters in order to check whether the requested service is supported by the network (and whether the subscriber is entitled to use the service) and to hunt  
15 and set up relevant sources in the MSC IWF (interworking function of the network control device MSC).

Within this invention, the BCIE information is used by the network control device (e.g. MSC or BSC or IWU) or by  
20 the mobile station MS to decide whether a handover to another radio access network is required.

Concerning packet switched services as the requested service, the mobile station MS requests a service by  
25 creating a PDP (Packet Data Protocol) context. This is effected by sending a data packet to the network. The data packet contains (among other things) a Quality of Service (QoS) request. The QoS defines for example whether the requested connection shall be "real time"  
30 (i.e. whether a certain data rate is to be guaranteed and a certain delay is not to be exceeded).

In a mobile terminated packet connection the corresponding information comes from the core packet  
35 network CN.

The packet network node PNN analyses the QoS parameters in order to be able to deal accordingly with the packets belonging to this context.

5

Within this invention the QoS information is used by the network control device (e.g. packet data node or BSC or IWU) or by the mobile station MS to decide whether a handover to another radio access network is required.

10

In the following, an example of a device for carrying out the above mentioned method according to the first and second embodiments is described with reference to Fig. 5.

Reference numeral 1 denotes a detecting means which  
15 detects the service request, that is, which performs step S11 of Fig. 2 or step S21 of Fig. 4, i.e. the process shown in Fig. 3. The detected service request is supplied to an analysing means 2, which performs the analysing  
step S12 of Fig. 2 or step S22 of Fig. 4. In case the  
20 analysing means determines that a handover is to be effected, the analysing means 2 supplies a corresponding handover request to an initiating means 3, which performs the initiating step S14 of Fig. 2 or S24 of Fig. 4.

25 The analysing means 2 can be adapted such that it uses a database 4 for determining the conditions for a sufficient support of the requested service in the different networks. That is, in this database all services of available radio access networks can be  
30 stored, including their specifications like bit rate, price of connection, delays etc.

The above description and accompanying drawings only illustrate the present invention by way of example. Thus,



- 23 -

the embodiments of the invention may vary within the scope of the attached claims.

- 24 -

## Claims

1. A method of interworking between different radio access networks (RAN-A, RAN-B), wherein
  - 5 a radio transceiver device (MS) capable of operating with a first radio access network (RAN-A) and a second radio access network (RAN-B) is attached to said first radio access network (RAN-A); said method comprising the steps of
    - 10 detecting (S11, S21) a service request;  
accessing (S121) information on conditions for the first and the second radio access network (RAN-A, RAN-B) for giving sufficient support for a service requested by said service request,
    - 15 analysing (S12, S22) whether or not said first radio access network (RAN-A) and said second radio access network (RAN-B) meets said conditions; and  
initiating a handover (S14, S24) of said radio transceiver device (MS) from said first radio access  
20 network (RAN-A) to said second radio access network (RAN-B) if the second radio access network (RAN-B) meets the conditions but the first radio access network (RAN-A) does not.
- 25 2. A method according to claim 1, wherein said conditions comprise a condition whether said requested service exists in the radio access network.
3. A method according to claim 1, wherein said  
30 conditions depend on each other.
4. A method according to claim 3, wherein one of said conditions for the first radio access network (RAN-A) is a given amount lower than the corresponding condition for  
35 the second radio access network (RAN-B).

5. A method according to claim 1, wherein said method is performed in said radio transceiver device (MS).

6. A method according to claim 1, wherein said method is performed in a network control device (MSC, IWU, PNN, BSC\_A, BSC\_B).

7. A method according to claim 6, further comprising the step of informing said radio transceiver device (MS) of the fact that a handover to said second radio access network (RAN-B) is to be initiated.

8. A method according to claim 1, wherein said radio transceiver device (MS) is a dual mode phone which is adapted to be operated in said first radio access network (RAN-A) and said second radio access network (RAN-B).

9. A method according to claim 1, wherein either said first or said second radio access network is a GSM network.

10. A method according to claim 1 or 9, wherein either said second or said first radio access network is a UMTS network.

11. A method according to claim 1, wherein said requested service is a circuit-switched service.

12. A method according to claim 1, wherein said requested service is a packet service.

13. A method according to claim 1, wherein an error procedure is initiated, when it is detected in said analysing step that said requested service is not available in any of said networks.

14. A method according to claim 13, in which said error procedure is a notification of the user.

5 15. A method according to claim 1, wherein said radio transceiver device (MS) is attached to said first radio access network (RAN-A) such that it is located in a cell (Cell\_A\_1) of said first radio access network (RAN-A) and connected by air with said first radio access network  
10 (RAN-A).

16. A method according to claim 15, wherein said radio transceiver device (MS) is also located in a cell (Cell\_B\_1) of said second radio access network (RAN-B).


15 17. A method according to claim 1, wherein said analysing step also analyses whether a subscriber using said radio transceiver device (MS) is entitled to use said requested service.

20 18. A network interworking device for a telecommunication network comprising at least two radio access networks (RAN-A, RAN-B), wherein  
a radio transceiver device (MS) capable of operating  
25 with said first radio access network (RAN-A) and said second radio access network (RAN-B) is attached to said first radio access network (RAN-A); said device comprising

30 a detecting means (1) for detecting a service request,

an analysing means (2) responsive to said detecting means (1) and having the functionality of

accessing information on conditions for said first and said second radio access networks

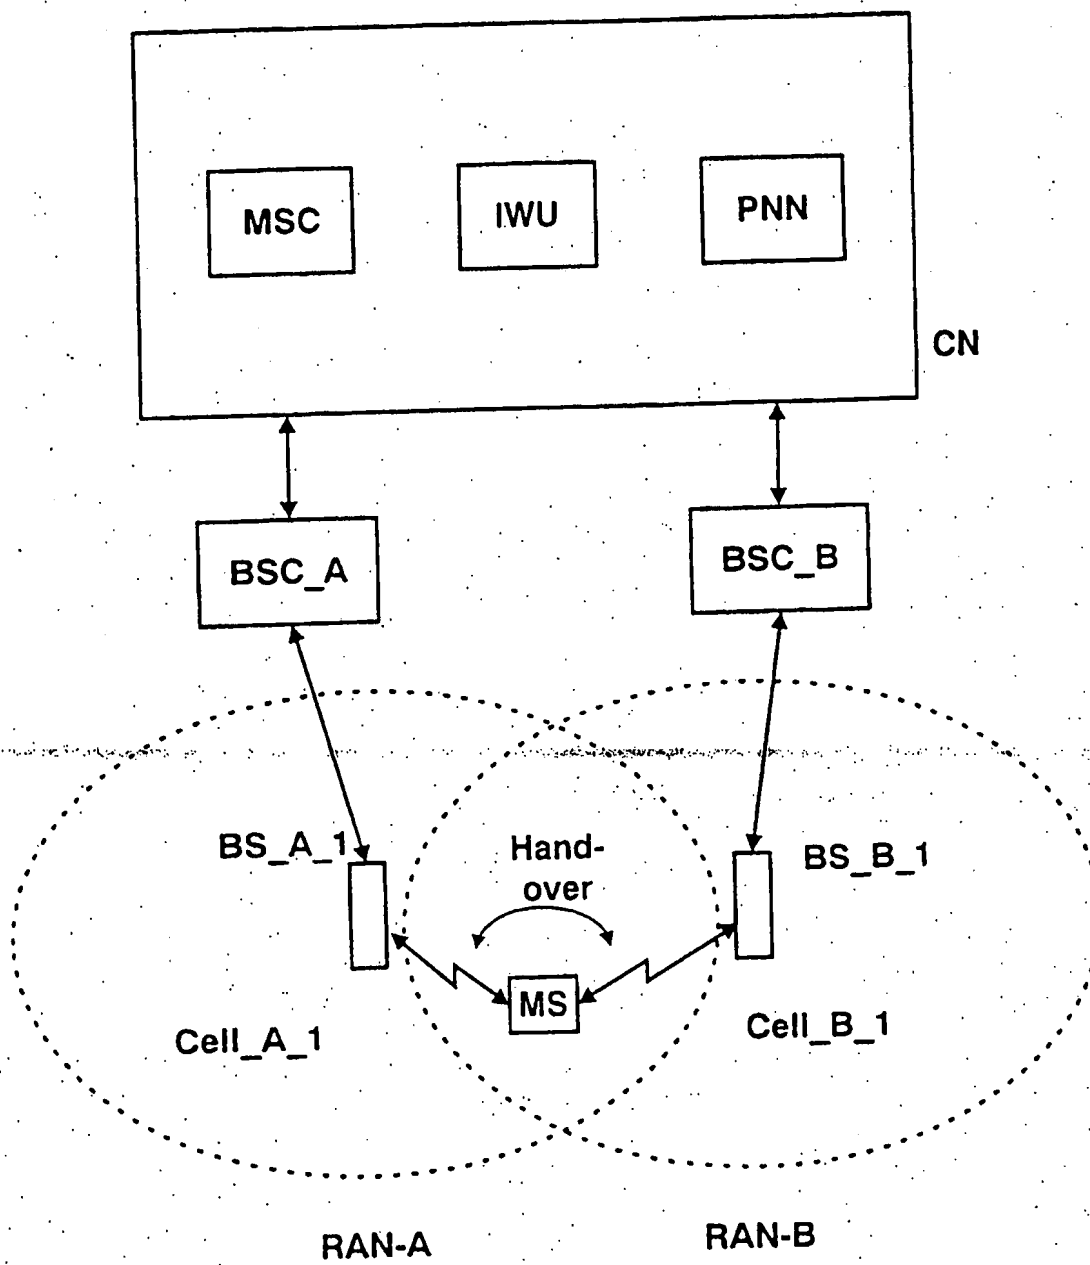**FIG. 1**

2/5

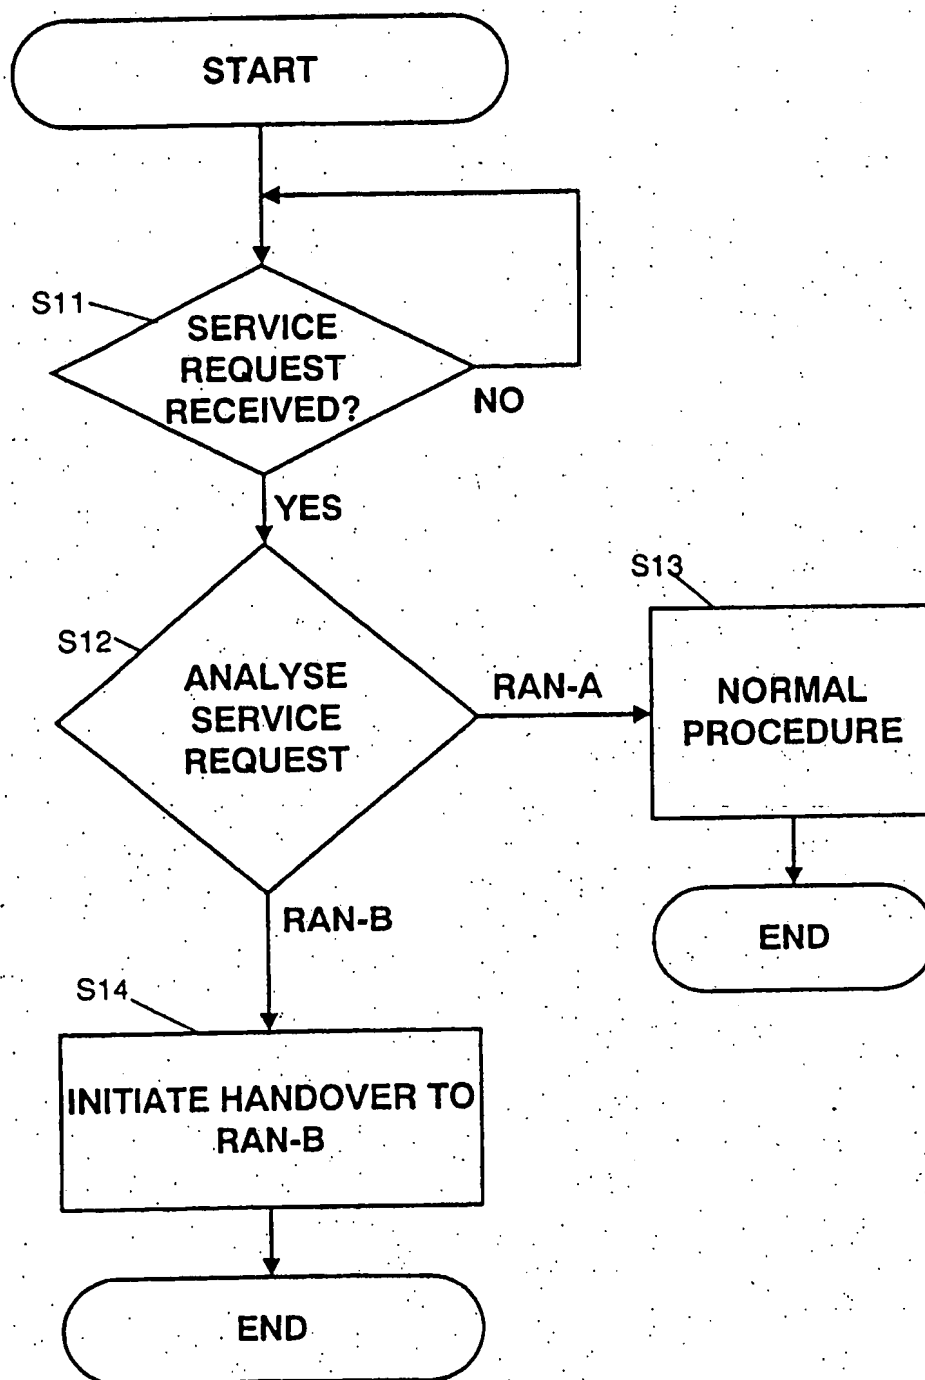


FIG. 2

3/5

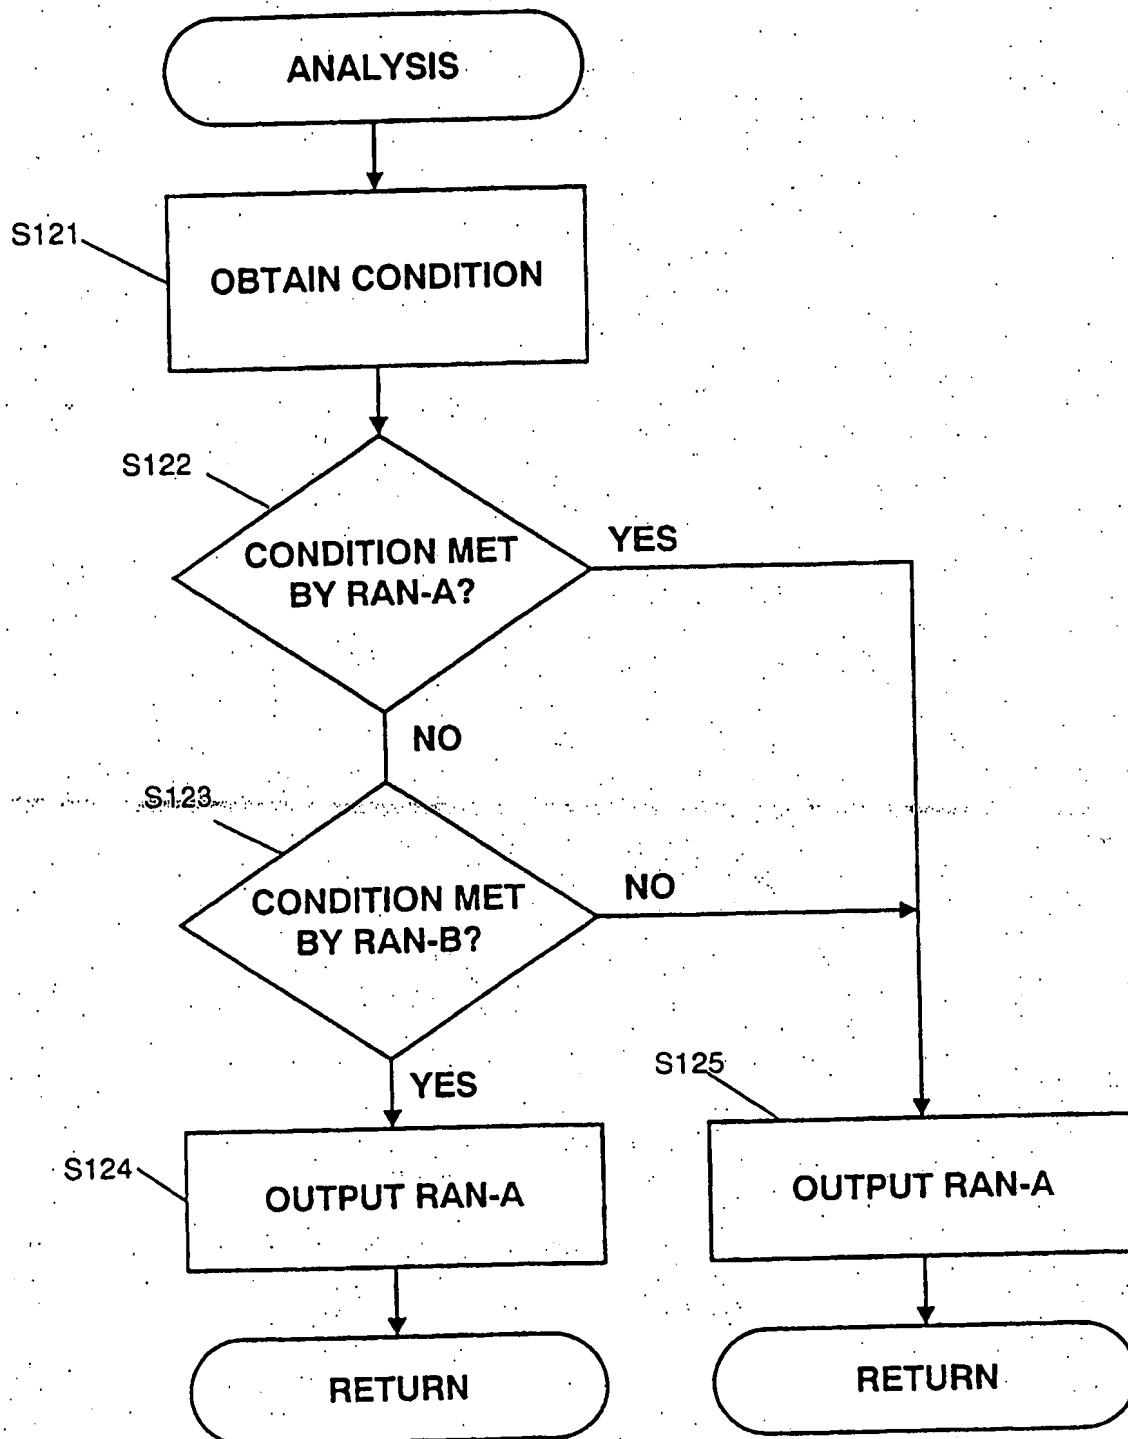


FIG. 3

4/5

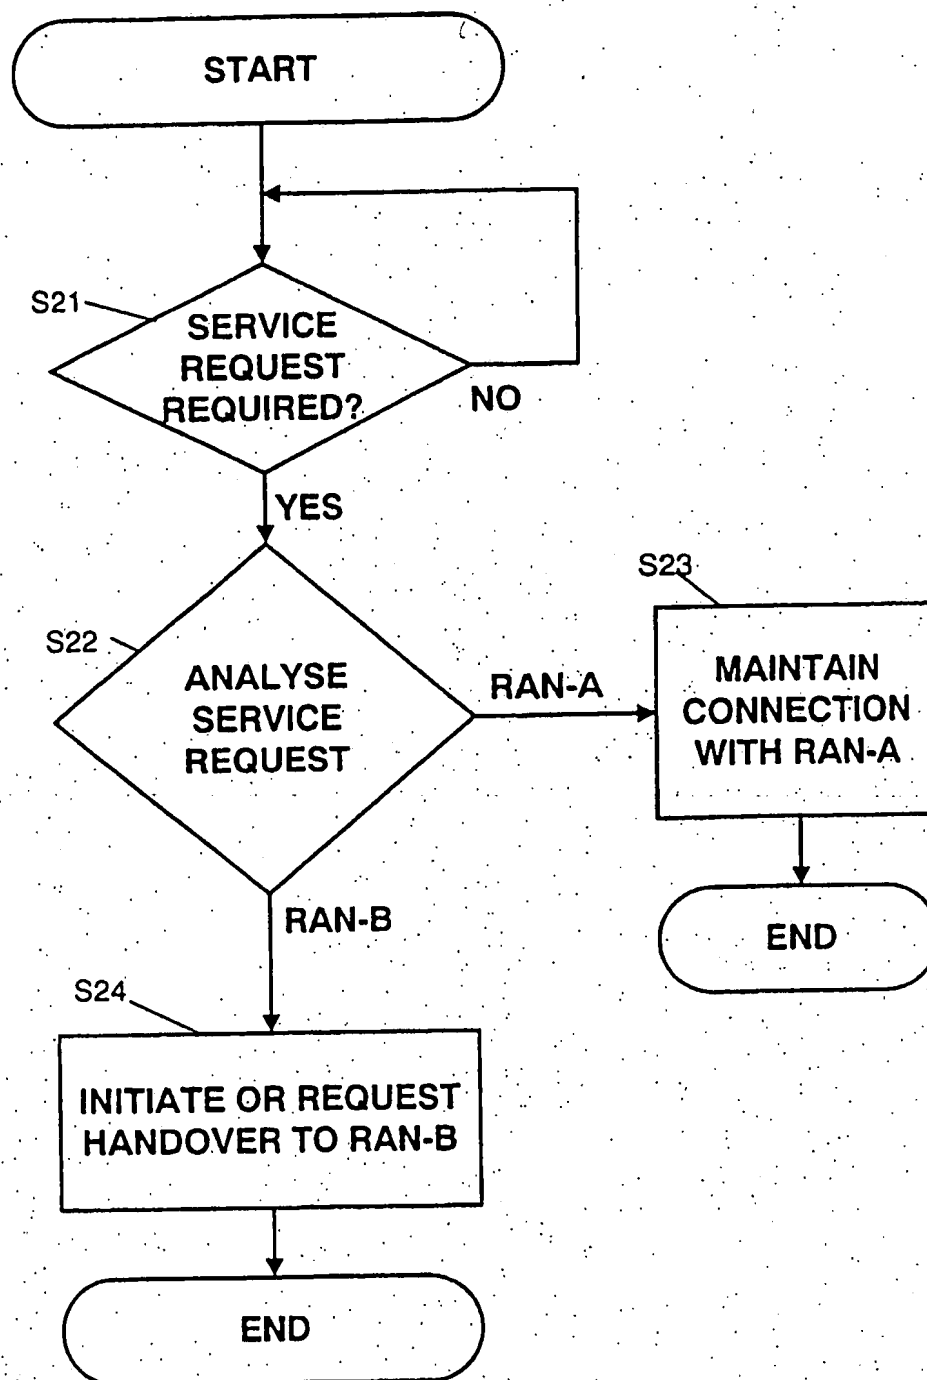


FIG. 4



5/5

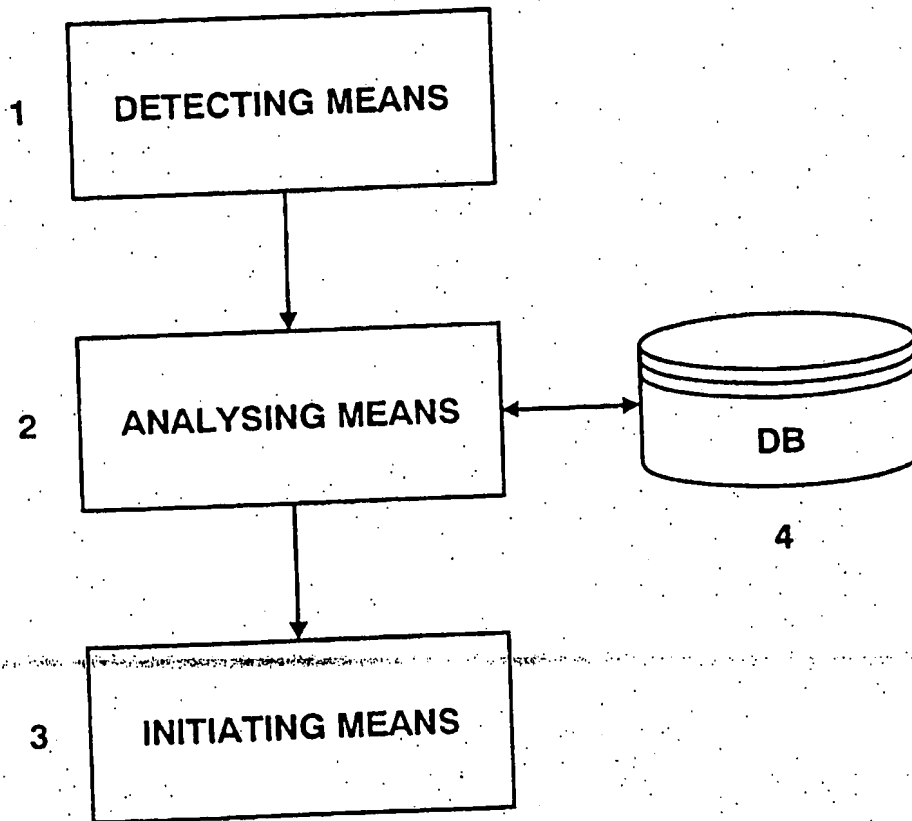


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Application No

PC1/EP 99/00452

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 28947 A (NOKIA MOBILE PHONES LTD ;VAZVAN BEHRUZ (FI); JORMALAINEN JANNE (US) 19 September 1996 (1996-09-19) page 1, line 28 - line 30 page 6, line 6 - line 17 page 10, line 25 - page 12, line 16 page 13, line 11 - line 16 -----	1-3,5,6, 8-20
X	WO 98 59513 A (NOKIA MOBILE PHONES LTD ;LINTULAMPI RAINO (FI)) 30 December 1998 (1998-12-30) page 2, line 11 - line 19 page 3, line 4 - line 6 page 6, line 3 - line 19 page 8, line 4 - line 11 -----	1,2,6,7, 9,10,15, 16,18,20



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

14. September 1999

Date of mailing of the international search report

21/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rothluebbers, C

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/00452

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9628947 A	19-09-1996	FI 951181 A AU 4881196 A EP 0815701 A JP 11501783 T	14-09-1996 02-10-1996 07-01-1998 09-02-1999
WO 9859513 A	30-12-1998	FI 972722 A AU 7656498 A	25-12-1998 04-01-1999

(RAN-A, RAN-B) for giving sufficient support for the  
a service requested by said service request and  
analysing whether or not said first radio  
access network (RAN-A) and said second radio access  
5 network (RAN-B) meet the conditions, and  
initiating means (3) responsive to said analysing  
means (2), the initiating means (3) being adapted to  
initiate a handover of said radio transceiver device (MS)  
from said first radio access network (RAN-A) to said  
10 second radio access network (RAN-B) if the respective  
conditions are not met by said first radio access network  
(RAN-A) but by said second radio access network (RAN-B).

19. A network interworking device according to claim 18,  
15 wherein said interworking device is arranged in said  
radio transceiver device (MS).

20. A network interworking device according to claim 18,  
wherein said interworking device is arranged in a network  
20 control device (MSC, PNN, IWU, BSC\_A, BSC\_B).

21. A network interworking device according to claim 18,  
wherein said analysing means (2) is connected to a  
database (4) for obtaining information regarding said  
25 conditions of said requested service.